


HOLLOW CONE

DESIGN FEATURES

- ▼ Conventional design using tangential whirl method of atomisation
- ▼ Durable
- ▼ Use where a circular pattern is required or in large area multiple installations where there is considerable overlapping of sprays
- ▼ Male and female connections
- ▼ Large free passage

SPRAY CHARACTERISTICS

- ▼ Spray pattern: Hollow Cone
- ▼ Spray angles: 70° to 120°
- ▼ Flow rates: 0.125 to 145 l/min

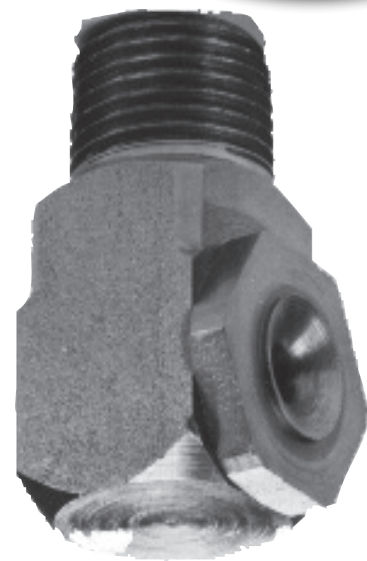

The WT is a tangential whirl hollow cone spray nozzle. The range consists of a large range of different sizes and flow rates. This nozzle has many uses and is used in the following applications:

Dry Scrubbing
Gas Scrubbing
Cooling
and more.

WT Flow Rates and Dimensions

Hollow Cone, Medium and Extra Wide Spray Angles, 1/8" to 3/4" Pipe Sizes, BSP or NPT

Male or female Pipe Size	Nozzle No	Spray Angles	K	Flow rates (l/min) at bar									Inlet Dia	Dimensions (mm)								Weight (g)	
				0.3 bar	0.5 bar	0.7 bar	1 bar	2 bar	3 bar	5 bar	7 bar	A		B	C	D	E	F	G	H	Met	Plas	
3/8"	WT100	70°	2.28	1.25	1.61	1.91	2.28	3.22	3.95	5.1	6.03	3.56	3.81	38.1	28.4	24.6	19.1	34	24.6	24.6	19.1	85	21
	WT130	120°	2.96	1.62	2.09	2.48	2.96	4.19	5.13	6.62	7.84	3.56	4.57										
	WT150	120°	3.42	1.87	2.42	2.86	3.42	4.83	5.92	7.64	9.04	4.32	4.57										
	WT160	70°	3.65	2	2.58	3.05	3.65	5.16	6.32	8.15	9.65	4.32	4.57										
	WT180	120°	4.1	2.25	2.9	3.43	4.1	5.8	7.1	9.17	10.9	4.32	4.83										
	WT200	70° 115°	4.56	2.5	3.22	3.81	4.56	6.45	7.89	10.2	12.1	4.83	5.08										
	WT220	120°	5.01	2.75	3.55	4.19	5.01	7.09	8.68	11.2	13.3	4.83	5.08										
	WT240	125°	5.47	3	3.87	4.58	5.47	7.73	9.47	12.2	14.5	4.83	5.08										
	WT260	120°	5.93	3.25	4.19	4.96	5.93	8.38	10.3	13.2	15.7	4.83	5.84										
	WT270	120°	6.15	3.37	4.35	5.15	6.15	8.7	10.7	13.8	16.3	5.08	5.84										
	WT300	70° 115°	6.84	3.74	4.83	5.72	6.84	9.67	11.8	15.3	18.1	5.08	5.84										
	WT350	115°	7.98	4.37	5.64	6.67	7.98	11.3	13.8	17.8	21.1	6.1	6.35										
	WT400	70° 105°	9.12	4.99	6.45	7.63	9.12	12.9	15.8	20.4	24.1	6.1	6.86										
	WT440	105°	10	5.49	7.09	8.39	10	14.2	17.4	22.4	26.5	6.6	7.62										
	WT500	70° 105°	11.4	6.24	8.06	9.53	11.4	16.1	19.7	25.5	30.1	6.6	7.11										
	WT560	105°	12.8	6.99	9.02	10.7	12.8	18	22.1	28.5	33.8	6.6	7.87										
WT600	70°	13.7	7.49	9.67	11.4	13.7	19.3	23.7	30.6	36.2	7.87	7.87											
WT1000	70°	22.8	12.5	16.1	19.1	22.8	32.2	39.5	51	60.3	8.64	9.65											
1/2"	WT500	70°	11.4	6.24	8.06	9.53	11.4	16.1	19.7	25.5	30.1	7.62	7.62										
	WT600	70°	13.7	7.49	9.67	11.4	13.7	19.3	23.7	30.6	36.2	8.38	7.87										
	WT800	70°	18.2	9.99	12.9	15.3	18.2	25.8	31.6	40.8	48.2	9.14	9.14	47.5	34.8	31.8	25.4	46	33.3	31.8	25.4	276	113
	WT1000	70° 110°	22.8	12.5	16.1	19.1	22.8	32.2	39.5	51	60.3	9.14	11.2										
WT1200	70°	27.3	15	19.3	22.9	27.3	38.7	47.4	61.1	72.4	10.2	12.2											
3/4"	WT800	70°	18.2	9.99	12.9	15.3	18.2	25.8	31.6	40.8	48.2	9.14	9.65										
	WT1000	70°	22.8	12.5	16.1	19.1	22.8	32.2	39.5	51	60.3	10.2	11.2										
	WT1200	70°	27.3	15	19.3	22.9	27.3	38.7	47.4	61.1	72.4	11.2	11.2										
	WT1400	80°	31.9	17.5	22.6	26.7	31.9	45.1	55.3	71.3	84.4	11.9	12.2										
	WT1600	80° 115°	36.5	20	25.8	30.5	36.5	51.6	63.2	81.5	96.5	12.2	13	57.2	41.1	38.1	31.8	55.6	39.6	38.1	31.8	397	227
	WT1800	80°	41	22.5	29	34.3	41	58	71	91.7	109	12.7	14.2										
WT2000	90°	45.6	25	32.2	38.1	45.6	64.5	78.9	102	121	13.2	15											
WT2200	90°	50.1	27.5	35.5	41.9	50.1	70.9	86.8	112	133	13.5	16											
WT2400	90°	54.7	30	38.7	45.8	54.7	77.3	94.7	122	145	14	17.5											